





ENVOY™

Operating Instructions - WITH METAL LINER


SITING: When siting the trash can near walls or structures it is essential to leave enough room to remove the hood and metal liner.

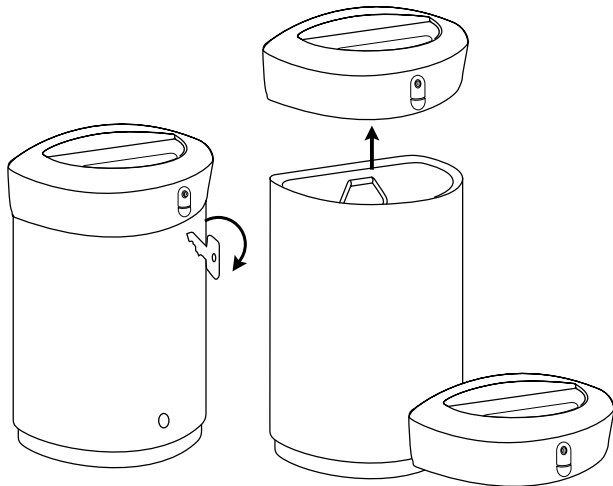


- 1.** Where a lock is fitted, insert the key into lock and turn clockwise. **2.** Lift hood to remove, place gently on the floor.

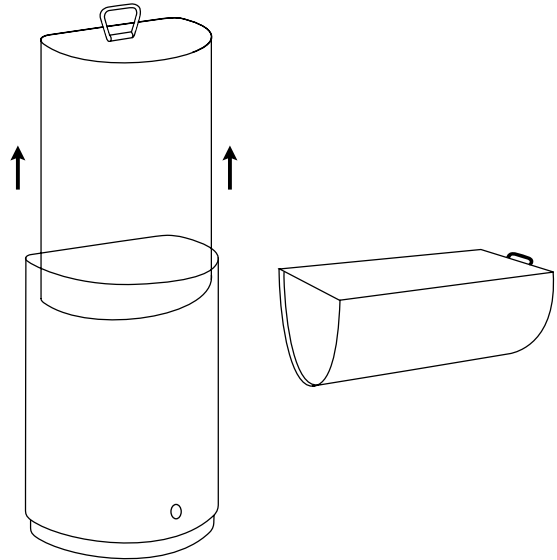

- 3.** Remove metal liner. **4.** Empty, using handle and hand grip at base of liner.

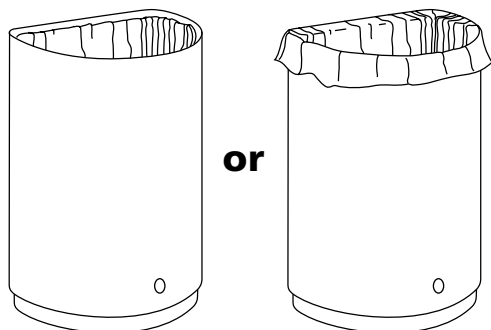

- 5.** Replace metal liner. Replace plastic sack (if required). Fold sack over metal liner or fold over outside of trash can.

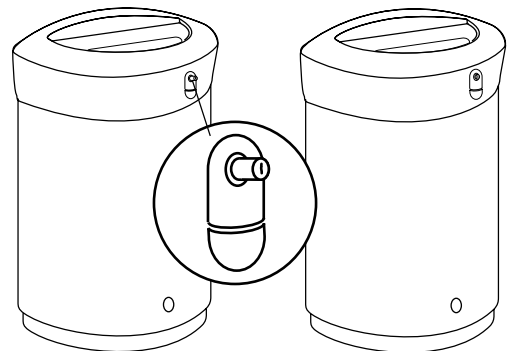


- 6.** Replace hood. Ensure lock is NOT engaged before replacing. **7.** To lock (if fitted) push in the protruding lock center.



ENVOY™


Operating Instructions - WITH PLASTIC SACK

SITING: When siting the trash can near walls or structures it is essential to leave enough room to remove the hood.

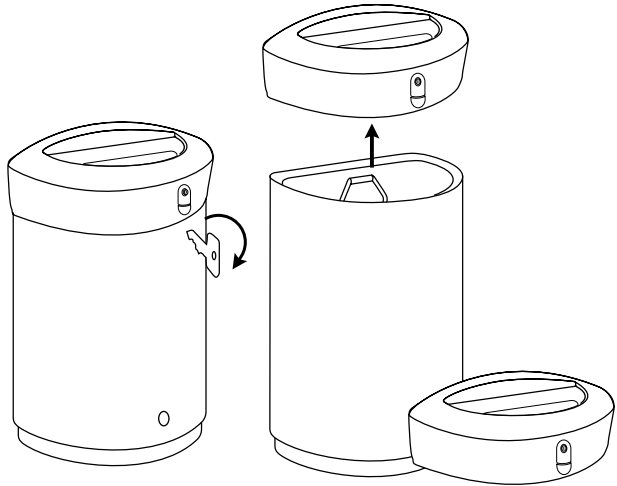


1. Insert the key into lock and turn clockwise. Lock option only.

2. Lift hood to remove, place gently on the floor.

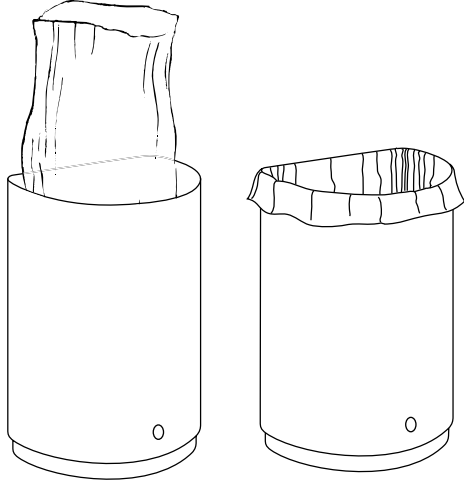


3. Remove plastic sack and secure or tie sack top (using a knot, loop or tape)

4. Replace plastic sack, fold over the outside of the trash can.



5. Replace hood. Ensure lock is NOT engaged before replacing hood.



6. To lock (if fitted) push in the protruding lock center.

CLEANING: Wash with a 10% solution of mild detergent/soap in warm water using a soft bristle brush, followed by a thorough rinse with clean water. DO NOT USE abrasive cleaners or hard bristle brushes. Buff with a soft cloth to remove any residue left from cleaning. The sheen may be returned to the plastic hood and body by spraying with furniture polish. Avoid spraying logos and stickers. Chrome trim should be cleaned regularly with proprietary chrome cleaner.

GRAFFITI: Felt tip pen marks may be removed from the plastic by using a proprietary graffiti remover, carefully following the instructions, particularly those covering safety. Ensure all traces of chemical are removed and then clean as above.

CAUTION: Graffiti remover could damage the logos and stickers, some protection may be afforded by masking off. Be sure to apply tape to the plastic and NOT the labels.



Glasdon AND ENVOY™ ARE TRADEMARKS OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES

A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.

Replacement components are available direct from Glasdon, Inc.

Glasdon, Inc. cannot be held responsible for claims arising from incorrect installation, unauthorized modifications or misuse of the product.

Issue 1 Sept 2011 Stock no. C000/0169

Copyright 2011

Glasdon, Inc. reserves the right to alter specifications without prior notice.



Glasdon

Glasdon, Inc.