




Froggo™ NOVELTY TRASH CAN

OPERATING INSTRUCTIONS

IMPORTANT NOTE: ENSURE THAT ALL RELEVANT PERSONNEL READ THE POINTS LISTED WITHIN THIS LEAFLET AND THAT A COPY IS GIVEN TO STAFF INVOLVED WITH THE INSTALLTION AND MAINTENANCE OF THIS PRODUCT.

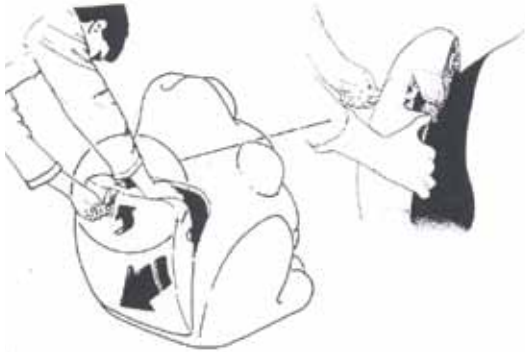

1. Using the key provided unlock and pull door away from main body. The door can then be fitted off using the hand holes provided.




2. Lift and slide out galvanized steel liner using the two drop handles.



3. After emptying, simply slide the liner back into position.




4. Locate bottom of door panel into base of main body.

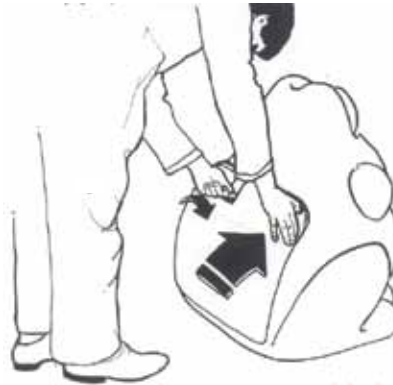

5. Simply push door panel back into its original position and lock with special key provided.

- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON, Inc.
- GLASDON, Inc. cannot be held responsible for claims arising from incorrect installation, unauthorized modifications or misuse of the product.



 **Glasdon** AND FROGGO ARE TRADEMARKS OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES