


NEXUS[®] 13G

GRAPHIC HOLDER ASSEMBLY INSTRUCTIONS

IMPORTANT NOTE:- ENSURE ALL RELEVANT PERSONNEL READ THESE INSTRUCTIONS PRIOR TO OPERATION

1. Integral Post Mounted Graphic Holder

Fixings Included



A


4 off

B




2 off

C



2 off

D



1 off

E



4 off

F



2 off

G





1 off


Also included, clear rigid wallet, gray card infill, 2 x PVC tubes, 10 x recycling graphics.

1.1 Fasten the 'P' clips (Part C) to the back of the unit ensuring the 'P' section is facing the outside edges of the unit. The clip is fastened through the location holes under the upper lip on the unit with the nylon washer (Part B) on the outer surface. The metal nut (Part E) is located in the inner surface and can be tightened using the wrench (Part G) provided.


1.2 Lay the unit on its front and pass each tube through a 'P' clip. Ensure the slotted section of the tube is at the top of the unit and that the slots face inwards.

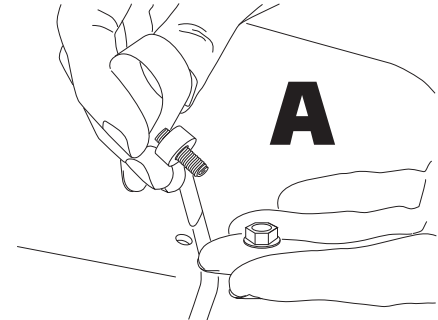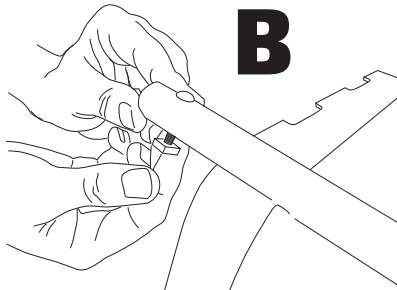


1.3 Pass the remaining screws through each of the locating holes near the base of each tube (diagram B). The remaining nuts can be loosely placed in position.

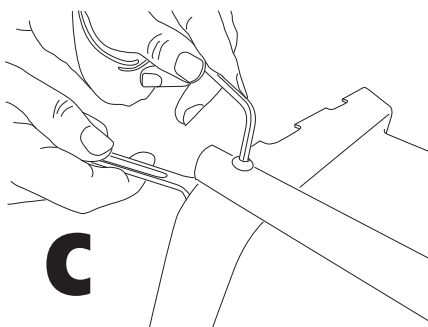

C

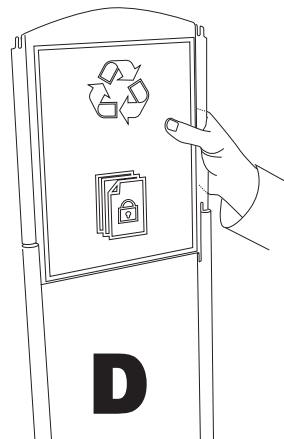

D

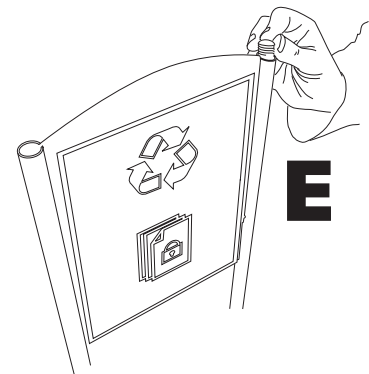

E

1.4 Push the tubes upwards until they reach the base of the unit and the screws are held in the locating slots at the base of the unit. Tighten the fixing screw and nut using the wrench and allen key provided (diagram C).

1.5 The graphic holder comprises of a clear rigid wallet, a gray card infill and optional graphics. Place the chosen graphic in front of the gray infill. (a second graphic can be placed behind the gray infill so it can be visible from the rear of the unit).

1.6 Slide the assembled wallet down in between the tubes until the hooks on the edge of the wallet locate at the base of each tube slot (diagram D).
1.7 Place the two caps in position on top of each tube (diagram E).

GRAPHIC HOLDER ASSEMBLY INSTRUCTIONS

IMPORTANT NOTE:- ENSURE ALL RELEVANT PERSONNEL READ THESE INSTRUCTIONS PRIOR TO OPERATION

1. Wall Mounting Graphic Holder

Fixings Included

Plastic caps

Wall plugs

Wall fixing screws



4 off




2 off



2 off

Also included, clear rigid wallet, gray card infill, 2 x PVC tubes and 5 x recycling graphics.


A

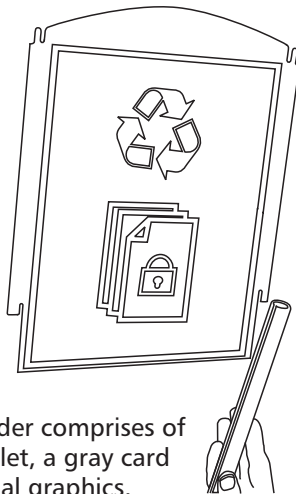

The graphic holder comprises of a clear rigid wallet, a gray card infill and optional graphics.


- 2.1 Place the gray infill into the rigid wallet. Place the chosen graphic in front of the gray infill.
- 2.2 Slide the gray tubes onto the edges of the rigid wallet (diagram A) until the tube reaches the top of the graphic holder and the hook features rest on the base of the slot in the tube (ensure the tubes are assembled so that the locating holes in each tube are on the rear face of the graphic holder).

B

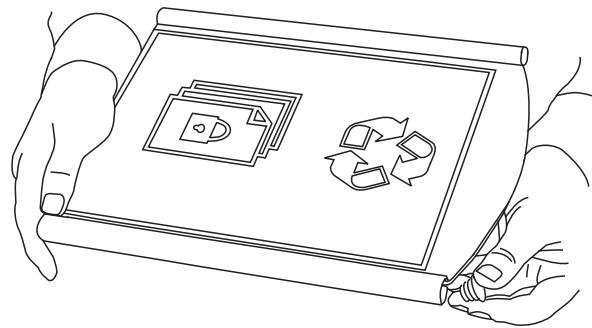

- 2.3 Place the two caps in the top of the tubes whilst holding the base in position, (diagram B), followed by two caps in the base.
- 2.4 Choose the appropriate position for the graphic holder, noting the height of the locating holes on the rear of the tubes.
- 2.5 Mark the wall at the fixing position ensuring they are level and 245mm apart.
- 2.6 For safety check for electric and water before drilling.

- 2.7 Drill wall with a 5mm drill bit at the marked holes 245mm apart.
- 2.8 Insert wall plugs ensuring they are flush with the wall surface.
- 2.9 Using a hexagon head screw driver insert the screw onto the wall leaving the head 4mm proud of the wall.
- 2.10 Hang the graphic holder onto the screw heads using the location holes in the tubes.

 **Glasdon** AND NEXUS[®] ARE TRADEMARKS OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES

- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON, Inc.
- GLASDON, Inc. cannot be held responsible for claims arising from incorrect installation, unauthorized modifications or misuse of the product.