





Splash™

Operating Instructions

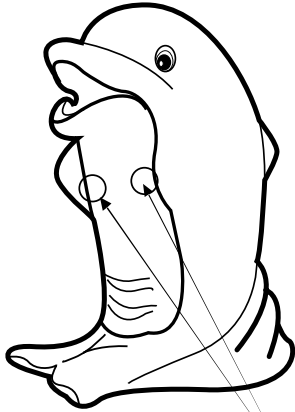


1. Locate both door catches through slots inside Splash's fins.

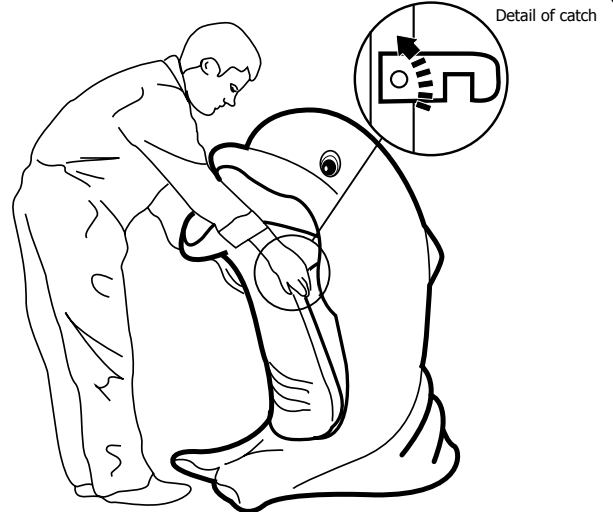

2. Whilst lifting both catches, pull door and lift away from Splash.



3. Tilt forward and lift out liner. After emptying replace liner.

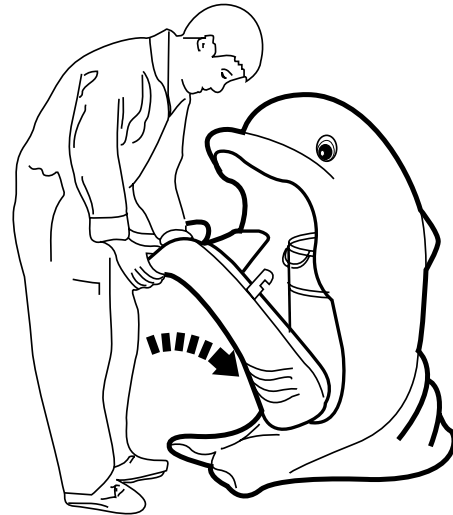

4. Using location peg on base of door locate peg into base and push door shut.

Regular cleaning is essential

To maintain the pristine appearance of this quality product all surfaces of the unit should be regularly cleaned with warm, soapy water and thoroughly rinsed. This is important in maintaining both the outward appearance of the product and ensuring ease of operation.



Glasdon AND SPLASH™ ARE TRADEMARKS OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES

A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.

Replacement components are available direct from Glasdon, Inc.

Glasdon, Inc. cannot be held responsible for claims arising from incorrect installation, unauthorized modifications or misuse of the product.

Issue 1 Sept 2011 Stock no. C000/0089

Copyright 2011

Glasdon, Inc. reserves the right to alter specifications without prior notice.



Glasdon

Glasdon, Inc.