


# Statesman™

## USER INSTRUCTIONS


**NOTE:** ENSURE THAT ALL RELEVANT PERSONNEL READ THE POINTS LISTED WITHIN THIS LEAFLET AND THAT A COPY IS GIVEN TO STAFF INVOLVED WITH THE INSTALLTION AND MAINTENANCE OF THIS PRODUCT.

### OPERATING INSTRUCTIONS (using 18" sack)

#### 1. REMOVE TOP


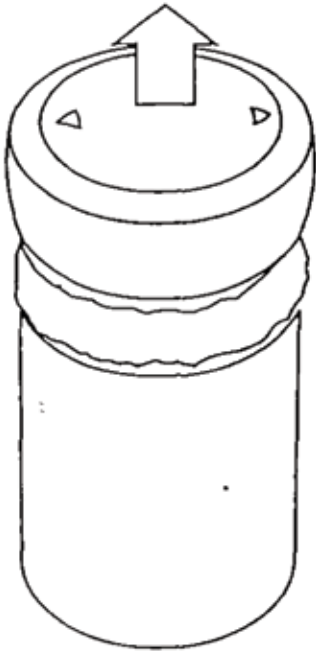


#### 2. GRASP SACK AND REMOVE

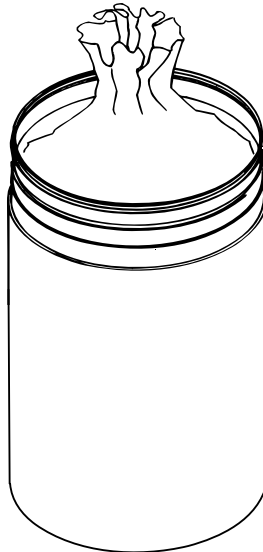


#### 3. POSITION SACK

Stretch the recommended liner bag over the bas 'neck', but no lower than the position marked. The unit is designed to accept standard 18" sacks (18" x 29" x 36/39") and not cause a skirting affect (protruding plastic when the trashcan is assembled). Larger sized liner bags may be used but this may be to the detriment of the product's aesthetics.

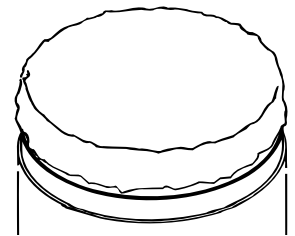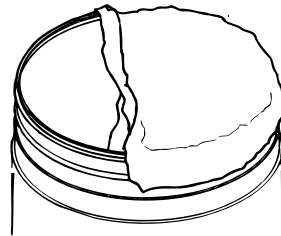


#### 4. REPLACE TOP

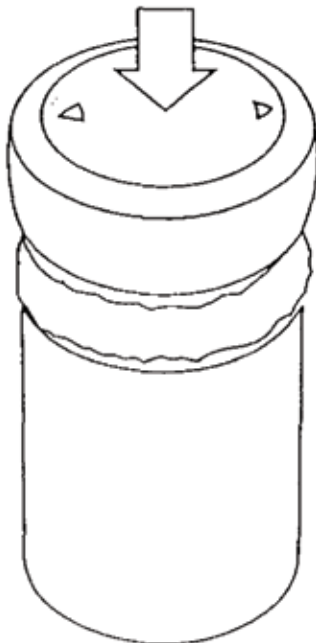


### OPERATING INSTRUCTIONS (With 24 Gallons Zintec Liner)


#### 1. REMOVE TOP

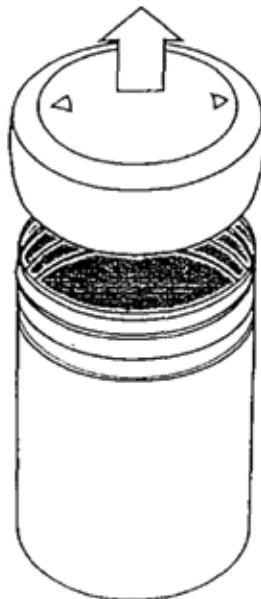

#### 2. REMOVE LINER EMPTY AND REPLACE


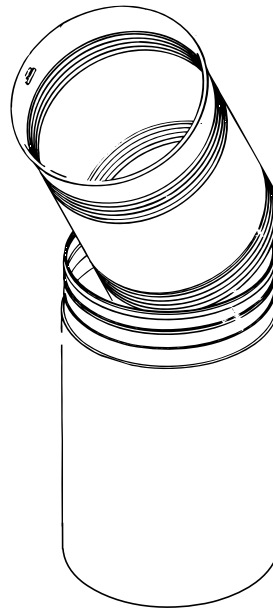


#### 3. REPLACE TOP

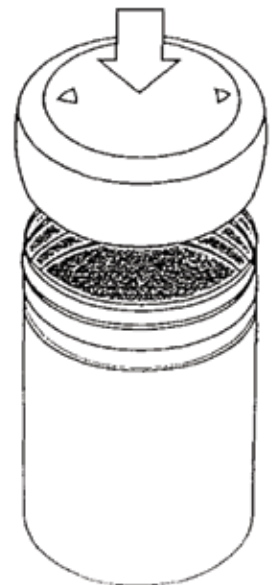


## OPTIONAL EXTRA : SACK DISPENSER

Rolled sacks are dropped into the bottom of the liner or Statesman base.

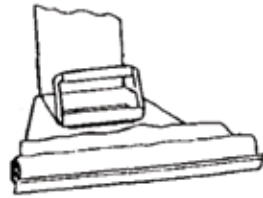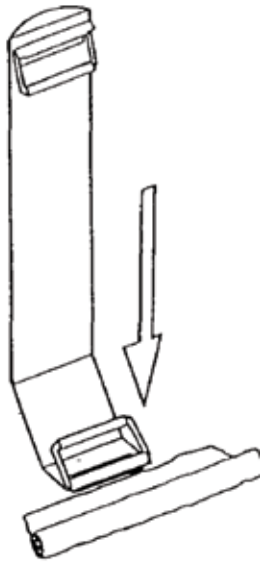


If the dispenser is used without a liner it must be ensured that the rolled liner bags lie on the correct side of the adapter plate as illustrated.

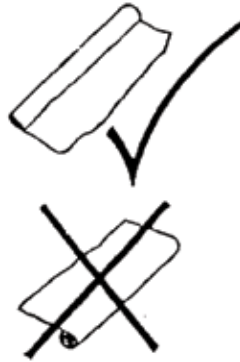



The rolled liner bags must be placed so that they roll from underneath.

The liner bags should be loaded as illustrated, the top end being retained by the sprung device. Liner bags should be torn off as required ensuring that sufficient of the remaining roll is pulled through to allow continued ease of operation.

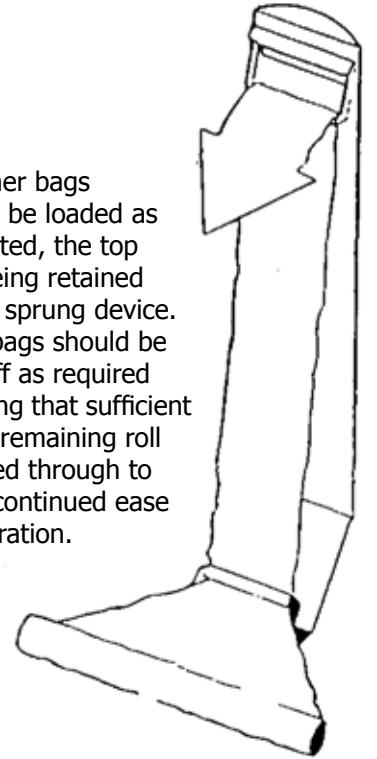

## OPTIONAL EXTRA : PLINTH ASSEMBLY


1. Remove base from packaging and remove backing paper from adhesive strips.

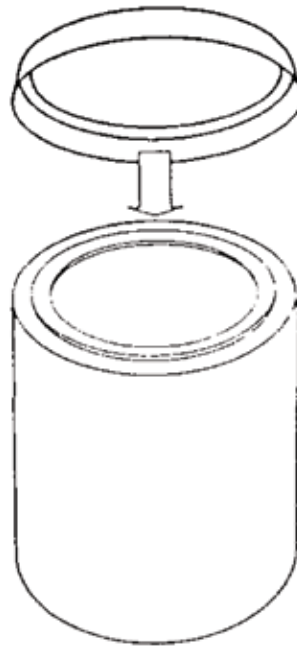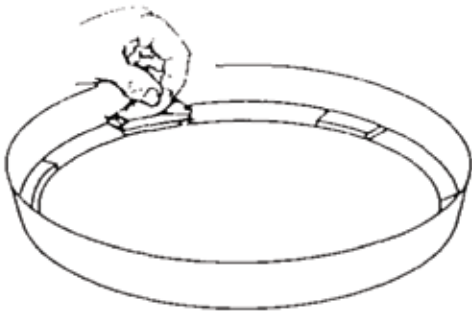

2. Remove the lid and turn the body upside down. Place the base centrally on the base and press down firmly. The base and trash can are now permanently fixed and can be moved, but they will not reach maximum bonding strength for a further 24 hours.

- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON, Inc.
- GLASDON, Inc. cannot be held responsible for claims arising from incorrect installation, unauthorized modifications or misuse of the product.



 **Glasdon** AND STATESMAN ARE TRADEMARKS OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES