


# Nexus<sup>®</sup> Transform


## OPERATOR & INSTALLATION INSTRUCTIONS

IMPORTANT NOTE: ENSURE THAT ALL RELEVANT PERSONNEL READ THESE INSTRUCTIONS PRIOR TO USE

### Aperture Lid Operation

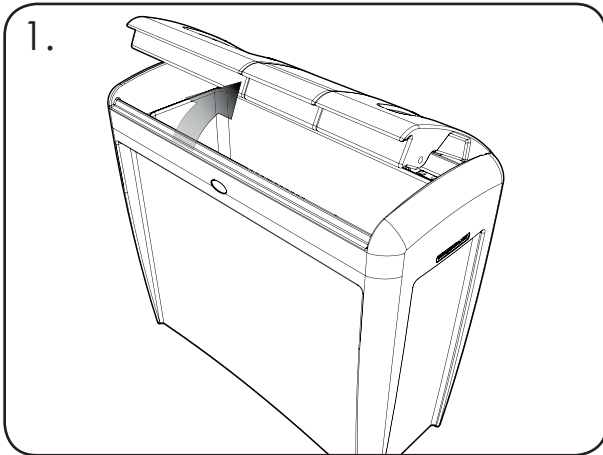


Using the finger lip at the front of the aperture panels lift the lid upwards.

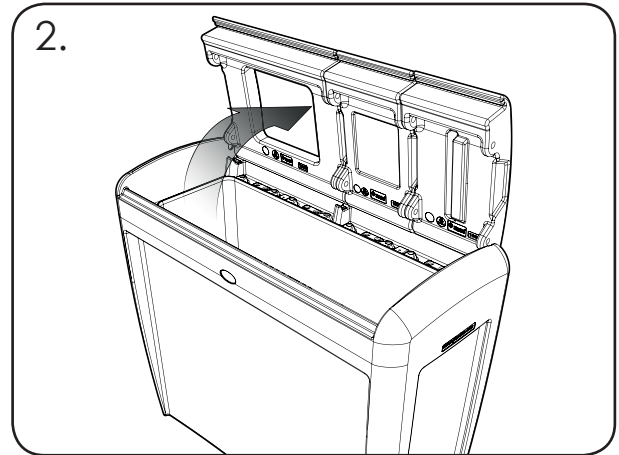


Open the lid to 90 degrees by pushing past the bump feature until the lid rests in an upright position. To close the lid pull the front down firmly to override the bump feature.

### Bag Holder Operation

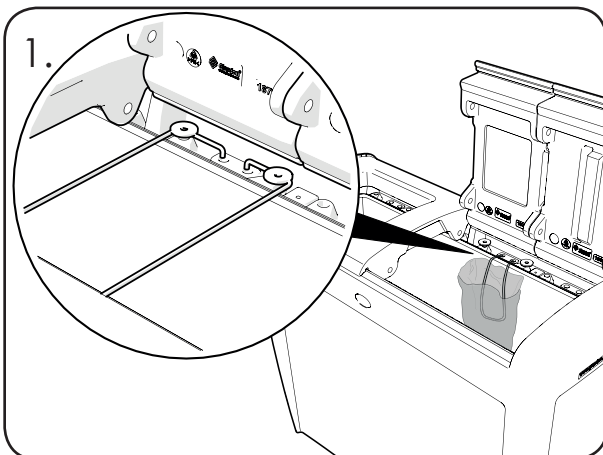

Step 1 - To insert bags - release the bungee cord from the upstands.


Step 2 - Place the bag in position and drop the loose bungee into the bag.

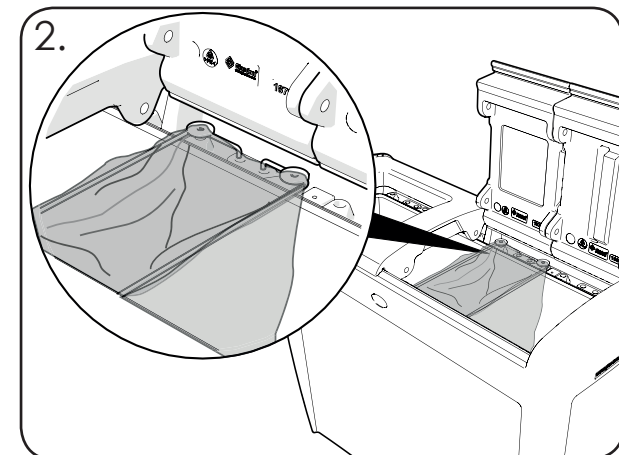


Step 3 - Stretch the bag over the rear upstands and hold in place with the bungee.

Step 4 - Stretch the bungee and bag over the front upstands to secure the bag.


## Cup Stacker and Reservoir Operation

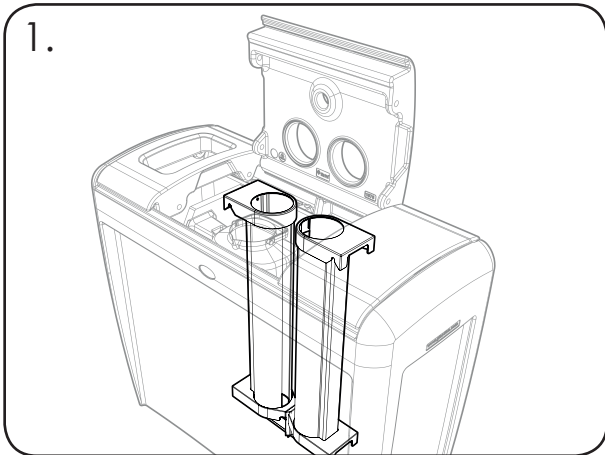


To remove the cup stacker from the unit to empty the cups, open the aperture panel.

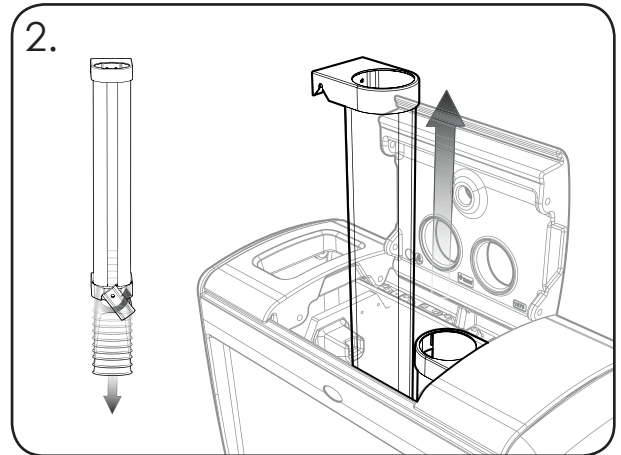

Lift the stacker off the support fixings. Use the quick release mechanism to release the cups. Place the stacker back onto the support fixings.

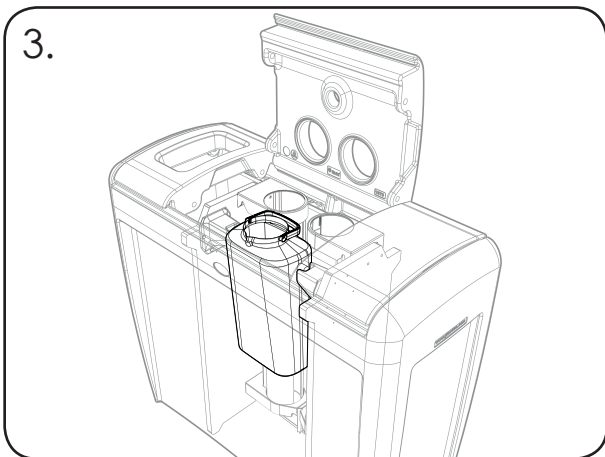


Empty the liquid reservoir by lifting it from the unit by the carry handle. Pour away the contents.

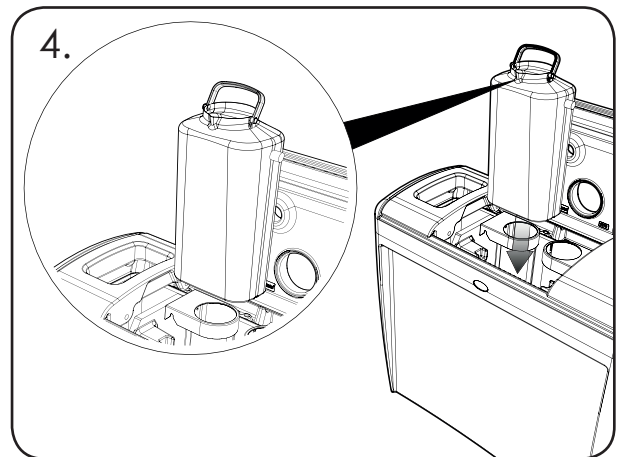


Replace the reservoir with the spout facing forward.

## Lock Kit Operations

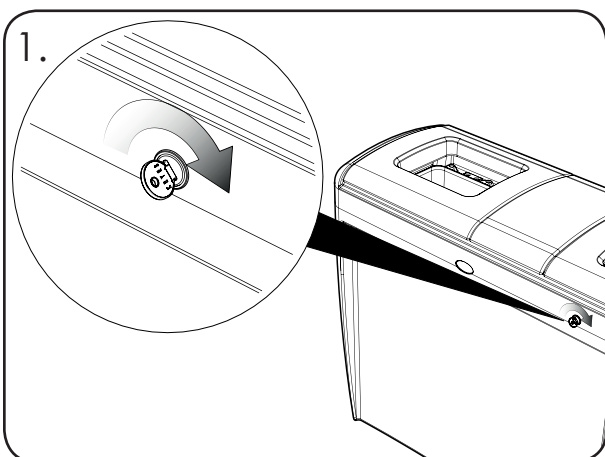

To unlock, twist key to 45 degrees clockwise until the barrel retracts.


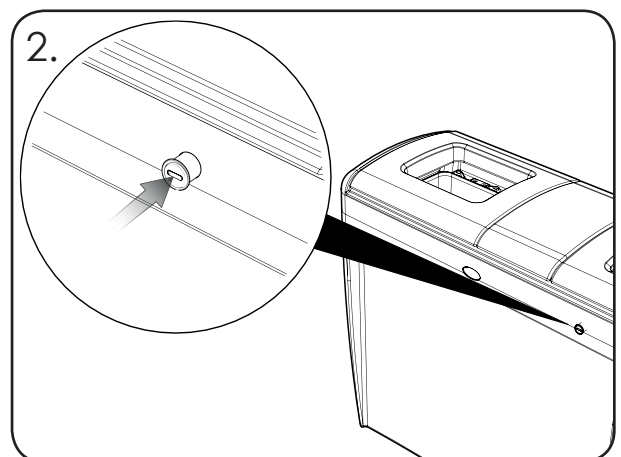


To lock, twist 45 degrees counter-clockwise and push the barrel inward.


## Wheel Kit Installation

### Kit Contents:

<b>ITEM 1</b>	Wheels	x2
<b>ITEM 2</b>	Screw M6 x 16mm	x8
<b>ITEM 3</b>	4mm Allen Key	x1

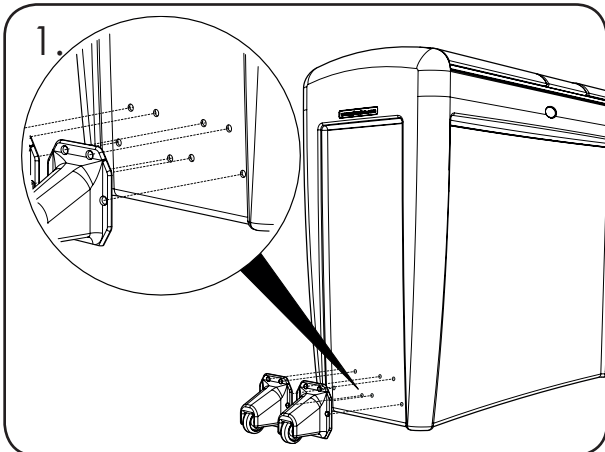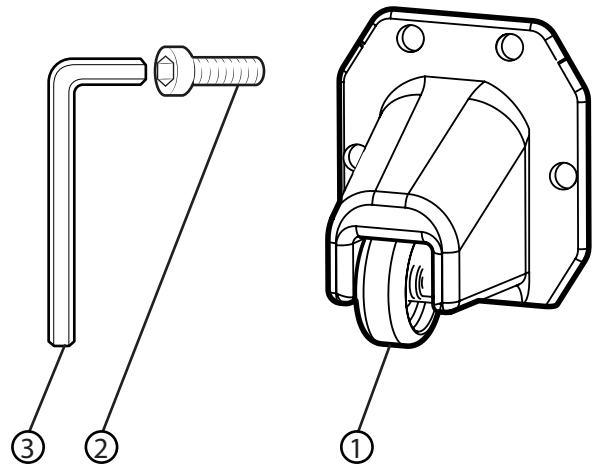


1. Line up wheels (Item 1) with fixing holes on side of the body.

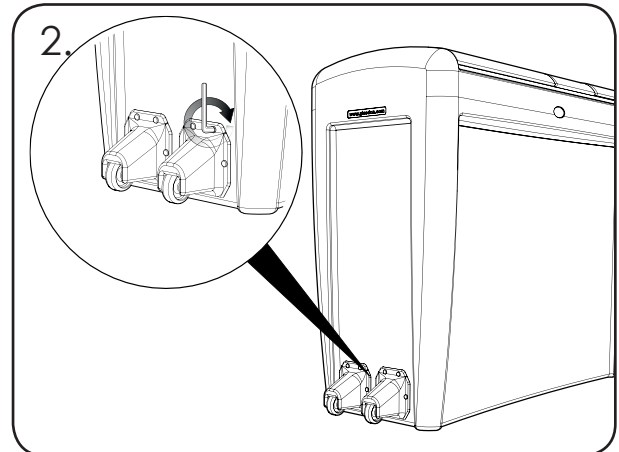


2. Insert screws (Item 2) through holes and tighten using Allen Key (Item 3).

## Wheel Operations

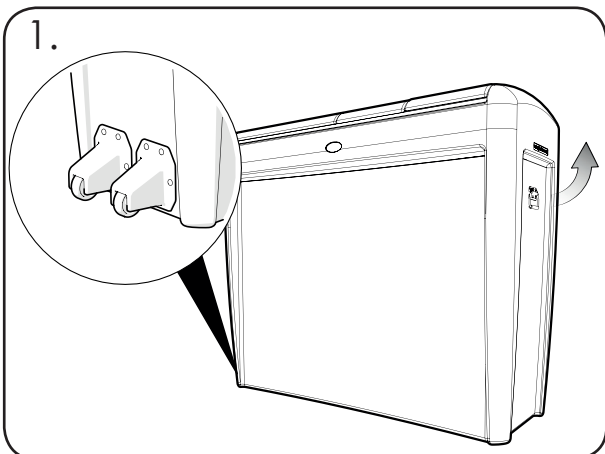


Use the handle to lift and tilt the bin until the wheels touch the ground allowing bin to be maneuverable.

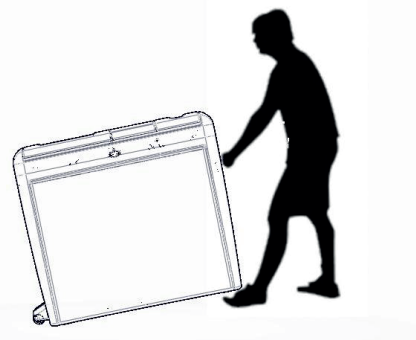



# Sign Kit Installation

## Kit Contents:


<b>Item 1</b>	Sign Board	x1
<b>Item 2</b>	Washer - M6 x 18mm	x6
<b>Item 3</b>	Screw - M6 x 20mm	x6
<b>Item 4</b>	4mm Allen Key	x1

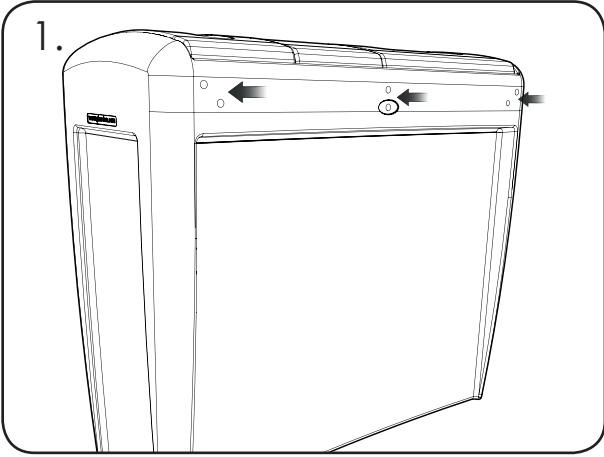

1. Locate the fixing positions on the rear of the unit.

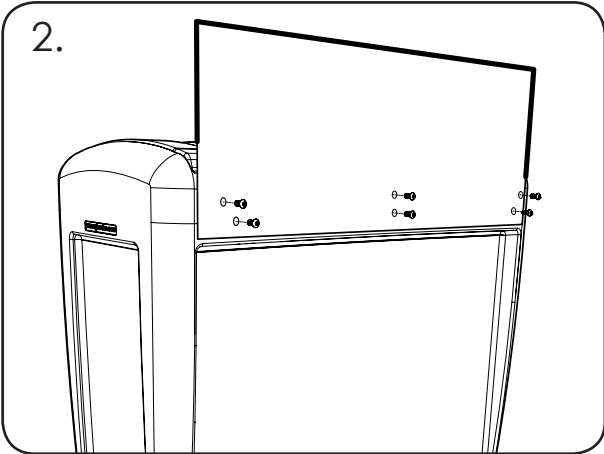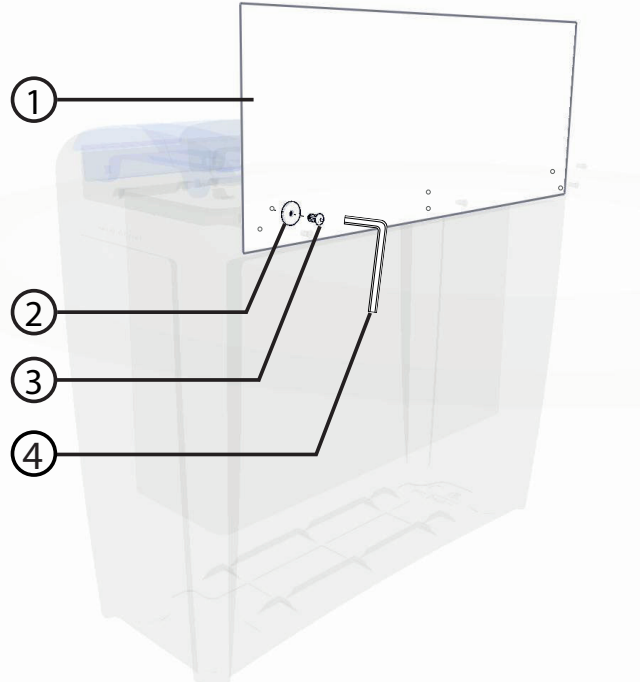

2. Position the sign carrier (item 1) and align the six fixing holes on the rear of the unit.

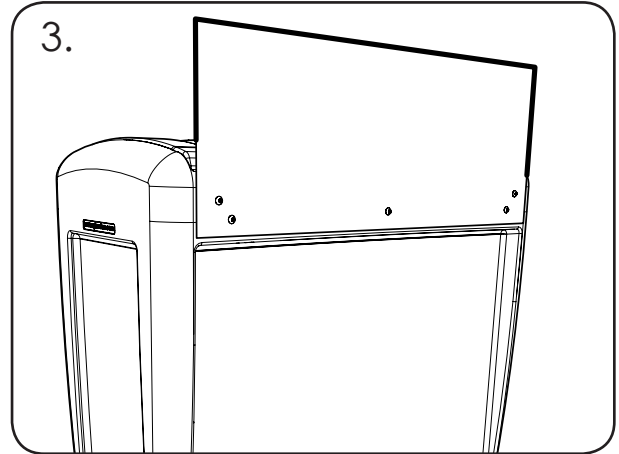

3. Fit the washers (Item 2) onto screws (Item 3) and fix through the holes in the backboard using Allen key (Item 4) to tighten.

**IMPORTANT NOTE:** PLEASE ENSURE THAT ALL RELEVANT PERSONNEL READ THE POINTS LISTED WITHIN THIS LEAFLET AND THAT A COPY IS GIVEN TO STAFF INVOLVED WITH THE INSTALLATION AND MAINTENANCE OF THIS PRODUCT  
**SAFETY NOTE:** PLEASE REFER TO 'THE MANUAL HANDLING OPERATIONS REGULATIONS 1992' DURING HANDLING.

 **Glasdon** AND NEXUS ARE REGISTERED TRADEMARKS OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES

- A planned maintenance schedule or regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from Glasdon.
- Glasdon cannot be held responsible for claims arising from incorrect installation, unauthorized modifications or misuse of the product.

Stock No. C000/0523 - DWG No. 07B-372-44 Issue 1 - February 2019

© Glasdon March 2019

Glasdon, Inc. reserve the right to alter specifications without prior notice.



**Glasdon, Inc.**

5200D Anthony Road  
Sandston  
VA 23150

Sales Inquiries: 1-855-USGLASDON

General Inquiries: 804-726-3777

Fax: 804-726-3778

E-mail: [info@glasdon.com](mailto:info@glasdon.com)

Web: [www.glasdon.com](http://www.glasdon.com)